

**MATERIAL/FINISH PROPERTIES**

**MATERIAL PROPERTIES:**


BODY: STAINLESS STEEL PER ASTM A582 OR EQUIVALENT  
 CONTACT: BERYLLIUM COPPER PER ASTM B196 OR EQUIVALENT  
 INSULATOR: PTFE PER ASTM D1710 OR EQUIVALENT  
 GASKETS: SILICONE RUBBER PER AA59588 OR EQUIVALENT

**PLATING PROPERTIES:**

BODY: PASSIVATE PER QQ-P-35, TYPE II  
 CABLE NUT: .000010 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290

**MECHANICAL/ELECTRICAL PROPERTIES**

CONNECTOR MEETS: MIL-STD-348 FIG. 304-2, MIL-PRF-39012  
 CONNECTOR MEETS: RoHS 2002/95/EC STANDARDS  
 CONNECTOR DURABILITY: 500 CYCLES MIN.  
 MOUNTING: PER ES117-BK510  
 PANEL THICKNESS: .250 [6.4] MAX.  
 CABLE: RG405 (.086 S/R) OR EQUIVALENT  
 ASSEMBLY INSTRUCTIONS: AI227  
 IMPEDANCE: 50 OHMS NOMINAL  
 FREQUENCY RANGE: DC-12 GHz  
 VOLTAGE RATING: 1,000 VRMS  
 INSULATION RESISTANCE: 5,000 MEGOHMS  
 DIELECTRIC WITHSTANDING VOLTAGE 2,500 VRMS

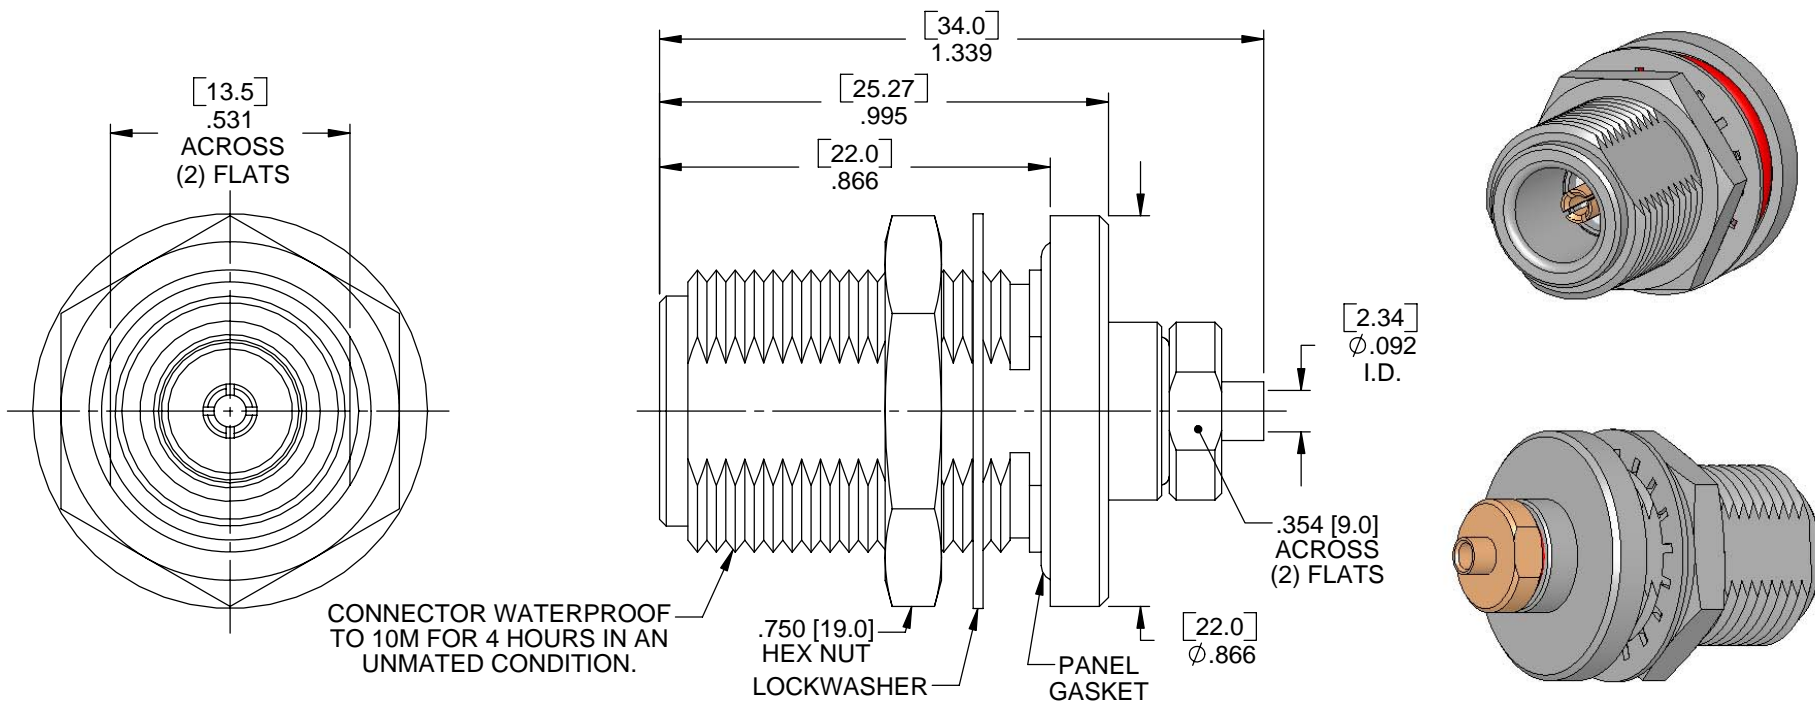

B	ECN 1394	TLB	02/06/13
A	NPR 474	TLB	12/18/07
<b>REV</b>	<b>DESCRIPTION</b>	<b>APPR</b>	<b>DATE</b>

# IntelliConnect

**UNLESS OTHERWISE SPECIFIED**  
 ALL DIMENSIONS ARE REFERENCE  
 X.XXX DIM'S = INCHES \* [X.XX] DIM'S = MILLIMETERS  
 SURFACE FINISH: 63 MICRO MAX.  
 ALL DIAMETERS TO BE CONCENTRIC WITHIN .005 F.I.M.

**TITLE:** N-TYPE SEALED STRAIGHT BULKHEAD MOUNT  
 CABLED JACK

**MATERIAL & FINISH:** PER TABLE ABOVE

<b>DRAWN BY:</b> SRS	<b>CHECK BY:</b> PCS	<b>APPR. BY:</b> TLB
<b>DATE:</b> 12/18/07	<b>DATE:</b> 12/18/07	<b>DATE:</b> 12/18/07

<b>CAGE CODE NO:</b> 5N5S5	<b>SCALE:</b> 2.5:1	<b>SIZE:</b> A	<b>REV:</b> B
----------------------------	---------------------	----------------	---------------

<b>SALES DRAWING</b>	<b>PART NO.</b> 5126-J1BK-103-102P	<b>SHEET</b> 1 OF 1
----------------------	---------------------------------------	------------------------