

Part Number: **DET-19-P00**

## Detector for U-Band

- 40GHz to 60GHz
- Greater than 1500mV/mW sensitivity
- Less than 3dB variation over band
- Compact and lightweight

**Input Port** WR-19 Waveguide, UG-383/U Flange  
**Output Port** SMA Connector, Female



**STOCK#:**

**Part Number: DET-19-P00**

## PRODUCT OVERVIEW

Precision mmw U band Detectors are built with high quality materials and by experienced high precision assemblers. These Detectors utilize a very sensitive Low-Barrier Schottkey Diode.

## APPLICATIONS

- Radar Systems
- Frequency Counters
- Power Monitoring
- Communication Systems

# PRECISION

## Operating Specifications


Parameter	Specification
Frequency Range	40GHz to 60GHz
Sensitivity	1500mV/mW Minimum
Flatness	+/-2.0dB Maximum
Linear Range	-35 to -10dBm Typical
Operating Range	-40 to +15dBm Typical

## Maximum Limits

Parameter	Ratings
Operating Temperature	-20 °C to 70 °C Ambient
Storage Temperature	-55 °C to +100 °C
Input Power (CW)	+17 dBm

Permanent damage may occur if any of these limits are exceeded.

- **Typical Data**

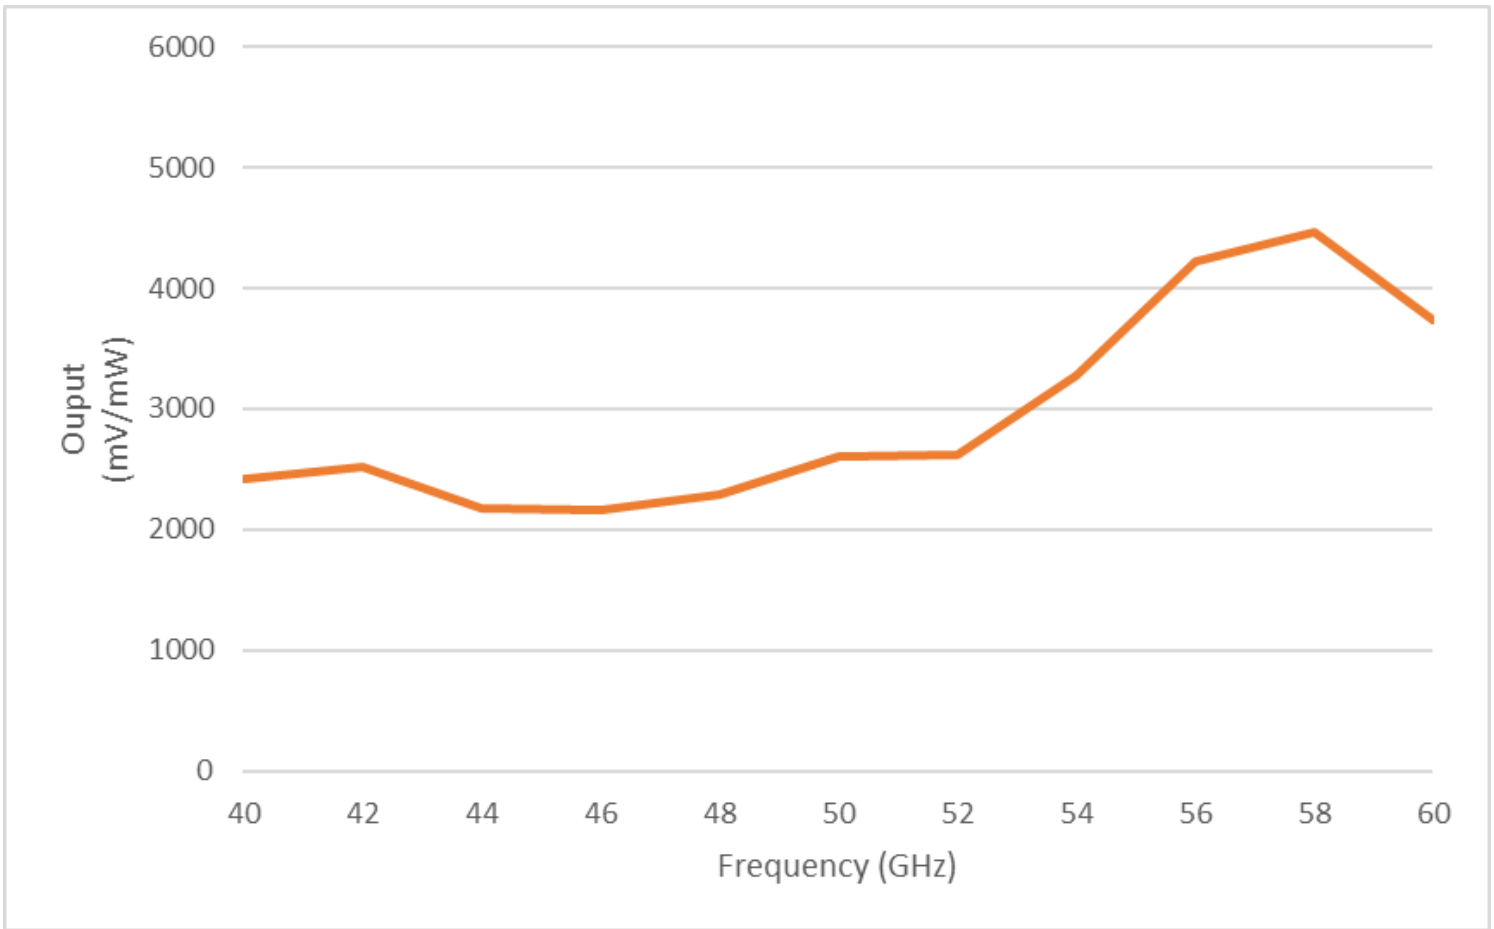

● **Dimensions in Inches**

