

Part Number: **DET-28-P00**

Detector for Ka-Band

- 26.5GHz to 40GHz
- Greater than 1800mV/mW sensitivity
- Less than 3dB variation over band
- Compact and lightweight

Input Port WR-28 Waveguide, UG-599/U Flange
Output Port SMA Connector, Female



STOCK#:

Part Number: DET-28-P00

PRODUCT OVERVIEW

Precision mmw Ka band Detectors are built with high quality materials and by experienced high precision assemblers. These Detectors utilize a very sensitive Low-Barrier Schottkey Diode.

APPLICATIONS

- Radar Systems
- Frequency Counters
- Power Monitoring
- Communication Systems

Operating Specifications

Parameter	Specification
Frequency Range	26.5GHz to 40GHz
Sensitivity	1800mV/mW Minimum
Flatness	+/-1.5dB Maximum
Linear Range	-35 to -10dBm Typical
Operating Range	-40 to +15dBm Typical


Maximum Limits

Parameter	Ratings
Operating Temperature	-20 °C to 70 °C Ambient
Storage Temperature	-55 °C to +100 °C
Input Power (CW)	+17 dBm

Permanent damage may occur if any of these limits are exceeded.



- **Typical Data**

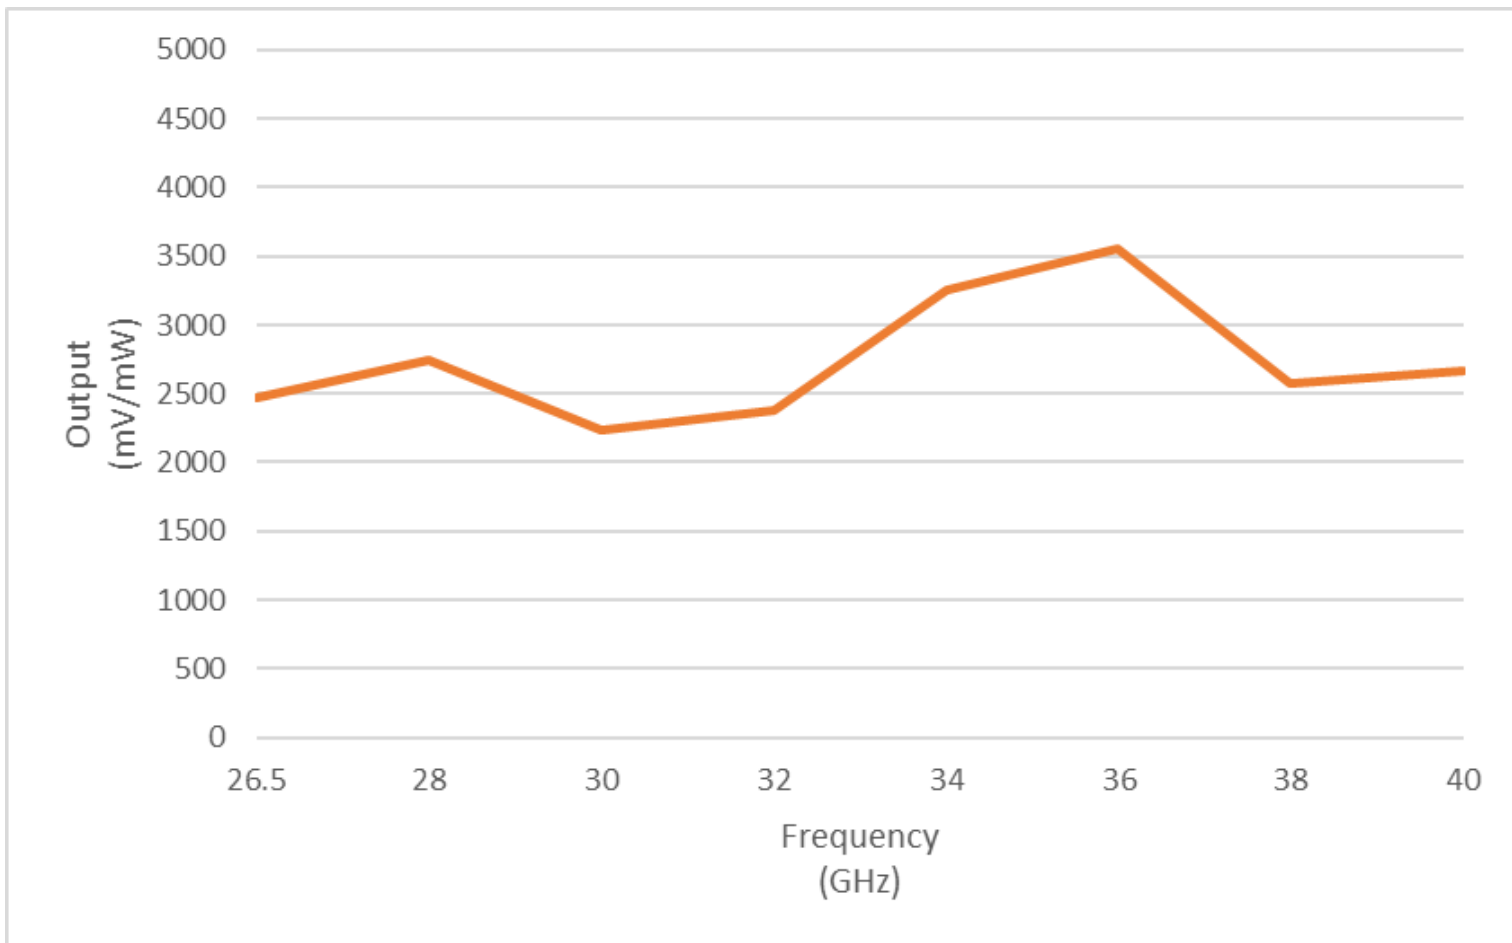

● **Dimensions in Inches**

